


40G OEO Converter(3R Repeater)

FEATURES

- Supporting QSFP to QSFP
- Supporting 1*40G Mode and 4*10G Mode
- Supporting Loopback test, precisely locating the failure, convenient for link test
- 3R function, stable data transmission
- Short delay time when transparent transmission
- Supporting Jumbo frame
- Supporting DMI(Diagnostic Monitoring Interface) function of optical transceivers
- With powerful network management function, supporting WEB and SNMP
- Supporting hot plug

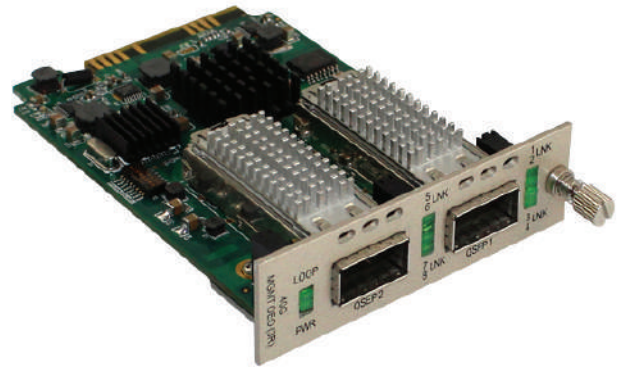

SPECIFICATIONS

Technical Parameters	
Interface Type	QSFP to QSFP
Power Dissipation	<8W
Operating Temperature	0 ~ 50°C
Humidity	5%-90%
Storage Temperature	-40~ 70°C
Dimension	112.8mm (W)×77.2mm(D)×23 mm(H) (Card)

ORDERING INFORMATION

PN	DESCRIPTION
L3R40GMR-x	40G OEO Converter(3R Repeater)
x	R: Rackmount card type
	S: Standalone with housing