


Lightem 1.25G CWDM SFP Transceiver 80km LCWS125SXXD80

FEATURES

- Standard SFP package.
- 80km transmission
- Operating Wavelength CWDM – 1270-1610nm
- Duplex LC, Single-Mode Transceiver
- Single +3.3V Power Supply
- Standard Operating Range: 0°C to 70°C Operating temperature
- Optional Industrial grade: -40°C to 85°C Operating temperature
- Uncooled DFB laser transmitter with internal isolator.
- Class 1/CDRHClass I Laser Eye Safe
- RoHS Compliant Products Available

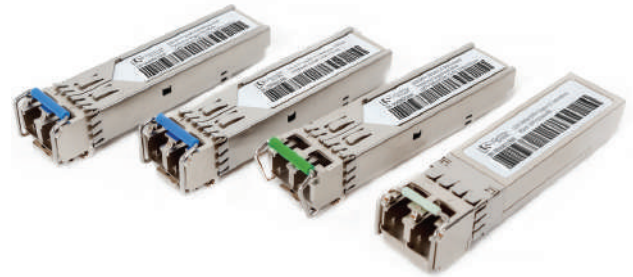

APPLICATIONS

- Metro/Access Networks
- Gigabit Ethernet
- Fiber Channel
- Other Optical Link
- Compatible with HP, Extreme, Cisco, Nortel, Alcatel applications.

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Storage Temperature	TC	-40	-	+85	°C	
Supply Voltage	VCCT, R	-0.5	-	4	V	
Relative Humidity	RH	5	-	+95	%	

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Min.	Typ.	Max.	Unit
Case operating Temperature	TC			+70 (Commercial)	°C
	TI	-40		+85 (Industrial)	°C
Supply Voltage	VCCT, R	3.13	+3.3	3.47	V
Power Supply Current	Icc		-	250 (Commercial)	mA
	Icc			300 (Industrial)	mA
Data Rate (Gigabit Ethernet)			1.25		Gbps
Data Rate (Fiber Channel)			1.063		Gbps
Distance on 9/125um G.652 SMF	Lmax			80	km

TELECOM/DATACOM SYSTEM

ELECTRICAL CHARACTERISTICS (TOP = -5 TO 700C, VCC = 3.13 TO 3.5 VOLTS)

Parameter	Symbol	Min	Typ	Max	Unit	Note
Transmitter						
Input differential impedance	RIN		100		Ω	1
Single ended data input swing	Vin, pp	250		1200	mV	
TX Disable High		Vcc-1.3		Vcc	V	
TX Disable Low		Vcc		Vcc+0.8	V	
TX Fault High		Vcc-0.5		Vcc	V	
TX Fault Low		Vee		Vcc+0.5	V	
Receiver						
Single ended data out swing	Vout, pp	300	400	800	mV	2
Data output rise time	tr			175	ps	3
Data output fall time	tf			175	ps	3
LOS Fault		Vcc-0.5		Vcc	V	
LOS Low		Vcc		Vcc+0.5	V	

Notes:

1. AC coupled
2. Into 100 ohm differential termination
3. 20-80%

OPTICAL CHARACTERISTICS

Tx/Rx: 1310/1490nm	Symbol	Min	Typ	Max	Unit	Ref
Transmitter						
Output Optical Power	PO	0	-	+5	dBm	1
Optical Wavelength - 1490nm	λ	x-6.5	x	x+6.5	nm	2
Special Width (-20dB)	$\Delta\lambda$	-	-	1	nm	
Slide Mode Suppression Ratio	SMSR	30	-	-	dBm	
Optical Rise/Fall Time	tr / tf	-	-	260	ps	3
Total Jitter	TJ	-	-	0.35	UI	
Optical Extinction Ratio	ER	9	-	-	dB	
Receiver						
Rx Sensitivity @ 1.25Gb/s	SENS	-	-	-25	dBm	4,5,6
				30	dBm	4,5,7
Receiver Overload	-	0	-	-	dBm	6
		-9	-	-	dBm	7
Optical Center Wavelength	λ_c	1270	-	1600	nm	
LOS De-Assert	LOSD	-		-26	dBm	6
				-31	dBm	7
LOS Assert	LOSA	-40	-	-	dBm	6
		-45	-	-	dBm	7
LOS Hysteresis	-	0.5	-	5	dB	

Notes:

1. Class 1 laser safety
2. The transmitter center wavelength
"x" = 1271, 1291, 1311, 1331, 1351, 1371, 1391, 1411, 1431, 1451, 1471, 1491, 1511, 1531, 1511, 1571, 1591, 1611
3. Unfiltered, 20-80%. Complies with Gigabit Ethernet eye masks when filtered
4. Measured with conformance signals defined in FC PI-2 Rev. 10.0 specification
5. Measured with PRBS 27 -1 at 10-12 BER

TELECOM/DATACOM SYSTEM

DIGITAL DIAGNOSTIC MONITORING INTERFACE

Parameter	Range	Accuracy	Calibration
Temperature	0~+70°C (C)	±3°C	Internal
	-40~+85°C (I)		
Voltage	2.97~3.63V	±3%	Internal
Bias Current	0~100mA	±10%	Internal
TX Power	0 ~ +5dBm	±3dB	Internal
RX Power	-25 ~ -0dBm (PIN)	±3dB	Internal
	-30 ~ -9dBm (APD)		

PIN DESCRIPTION


Pin	Symbol	Name /Description	NOTE
1	VEER	Transmitter Ground (Common with Receiver Ground)	1
2	T FAULT	Transmitter Fault.	2
3	T DIS	Transmitter Disable. Laser output disabled on high or open.	3
4	SDA	2-wire Serial Interface Data Line	4
5	SCL	2-wire Serial Interface Clock Line	4
6	MOD_ABS	Module Absent. Grounded within the module	4
7	RS0	Rate Select 0	5
8	LOS	Loss of Signal indication. Logic 0 indicates normal operation.	6
9	RS1	No connection required	1
10	VEER	Receiver Ground (Common with Transmitter Ground)	1
11	VEER	Receiver Ground (Common with Transmitter Ground)	1
12	RD-	Receiver Inverted DATA out. AC Coupled	
13	RD+	Receiver Non-inverted DATA out. AC Coupled	
14	VEER	Receiver Ground (Common with Transmitter Ground)	1
15	VCCR	Receiver Power Supply	
16	VCCR	Transmitter Power Supply	
17	VEER	Transmitter Ground (Common with Receiver Ground)	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	VEER	Transmitter Ground (Common with Receiver Ground)	1

Notes:


- Circuit ground is internally isolated from chassis ground.
- TFAULT is an open collector/drain output, which should be pulled up with a 4.7k – 10k Ohms resistor on the host board if intended for use. Pull up voltage should be between 2.0V to Vcc + 0.3VA high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. Low output indicates normal operation. In the low state, the output is pulled to <0.8V.
- Laser output disabled on TDIS >2.0V or open, enabled on TDIS<0.8V.
- Should be pulled up with 4.7kΩ- 10kΩ host board to a voltage between 2.0V and 3.6V. MOD_ABS pulls line low to indicate module is plugged in.
- Internally pulled down per SFF-8431 Rev 4.1.
- LOS is open collector output. It should be pulled up with 4.7kΩ – 10kΩ on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

TELECOM/DATACOM SYSTEM

PIN OUT OF CONNECTOR BLACK ON HOST BOARD

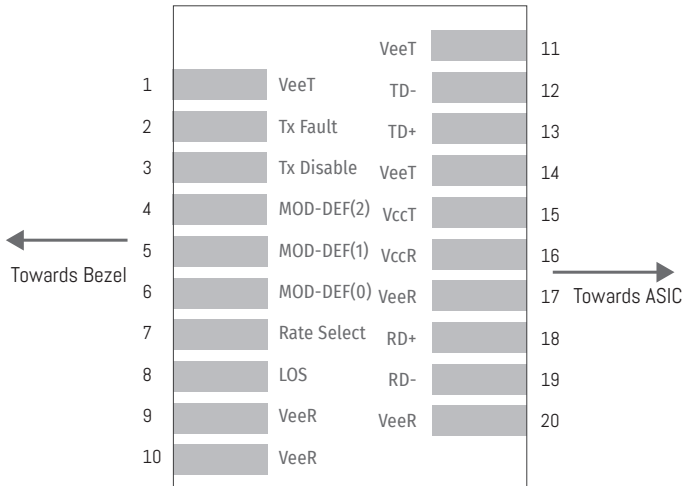

MECHANICAL DIMENSIONS

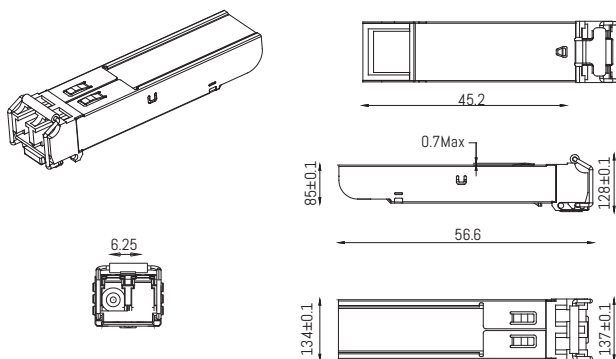

Units in mm

ORDERING INFORMATION

PN	DESCRIPTION
LCWS125SxxD80-x	Lightem 1.25G CWDM SFP Duplex LC 1xx0nm 80km
xx -	wavelength
	27- 1270nm 29- 1290nm 31- 1310nm 33- 1330nm
	35- 1350nm 37- 1370nm 39- 1390nm 41- 1410nm
	43- 1430nm 45- 1450nm 47- 1470nm 49- 1490nm
	51- 1510nm 53- 1530nm 55- 1550nm 57- 1570nm
	59- 1590nm 61- 1610nm
x-	l: optional industrial grade
eg LCWS125S47D80l	Lightem 1.25G CWDM SFP Duplex LC 1470nm 80km Industrial grade