

10 Ports 10/100M Industrial POE Switch with 2x GE SFP/RJ45 Combo

LIPOF10-2C is a 8x 10/100M POE RJ45 port and 2x (10/100/1000M) RJ45/SFP Combo Industrial POE switch. Its casing is IP40 rated and meet EMC industrial level 4 requirements. Features 3KV network port surge protection which is important for harsh outdoor environment and ensure the reliability of the uninterrupted system.




FEATURES

- 8x 10/100M POE RJ45 and 2x GE SFP/RJ45 Combo
- Supports IEEE 802.3af (15.4W per port) and 802.3at (30W per port)
- Supports IEEE 802.3x flow control for Full-duplex Mode and backpressure for Half-duplex Mode
- RJ45 Ports AUTO Negotiation/AUTO MDI/MDIX
- MAC address table of the PoE Switch with auto-learning and auto-aging
- Supports full-duplex and half-duplex auto-negotiation
- LED indicators for monitoring power, link, activity and POE status
- Support Din Rail Mount
- IP40 protection

SPECIFICATIONS

10 Ports 10/100M Industrial POE Switch with 2x GE SFP/RJ45 Combo	
Number of POE RJ45 ports (10/100BaseT)	8
Number of GE RJ45/SFP Combo port	2
Power Pin Assignment	1/2 and 3/6 , or alternatively over 4/5(+) and 7/8 (-)
Performance Specifications	
Transmission Method	Store-And-Forward
Network Protocol and Standards	IEEE 802.3u
	IEEE 802.3x Flow Control
POE standard	IEEE802.3af or IEEE802.3at
POE power	15.4W per POE port (IEEE802.3af)
	30W per POE port (IEEE802.3at)
Environmental	
Operating temperature	-40 ~ 80°C
Storage temperature	-40 ~ 85°C
Operating humidity	5 ~ 95% non condensation
Power Supply	DC 48-57V
Power Consumption	130W (15.4W per POE port) / 250W (30W per POE port)
LED indicators	Power supply, network status, POE status
Physical	
Dimension	165 x 148 x 54mm
Weight	1.7kg

FUNCTIONAL DIAGRAM

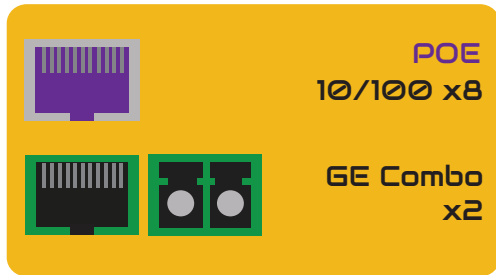

ORDERING INFORMATION

PN	DESCRIPTION
LIPOF10-2C-x	10 Ports 10/100M Industrial POE Switch with 2x GE SFP/RJ45 Combo
x-	F- IEEE802.3af (154W per port)
	T- IEEE802.3at (30W per port)
PEA-52-130	Power adaptor 220VAC~52VDC: 130W
PEA-52-250	Power adaptor 220VAC~52VDC: 250W